



60W SD chime Tel Input 100V

## Descriptions

The mixer amplifier with MP3 player is range 60W.

Its design is suitable for both tabletop and rack mount.

The two mic inputs by both XLR type and phoenix connectors, mic1 vox level is also provided. Aux input make it possible to add another audio source.

The Pre out and AMP in could be used to add signal processing equipments like mixer and EQ to achieve better sound quality.

The SD card slot on the rear panel provides secure and convenient operation for MP3 file input.

Another unique feature is telephone paging system and music on hold system.

These 70V, 100V and low impedance 4-16ohm speaker terminals are flexible for user during installation.

The 100V technique reduces line losses on longer distances and allows easy parallel connection of multiple loudspeakers.

It is typically used in villas, shops, supermarkets, restaurants, bars, theme parks, schools, canteens, garages and other places where BGM creates the right atmosphere, as well as clear voice announcement is needed.

## Features

- \* Amplifier built-in MP3 player
- \* Tabletop and rack mount design
- \* Rated power output 60W
- \* 70V, 100V and low impedance 4-16ohm speaker outputs
- \* 2 mic inputs by both XLR type and phoenix connectors.
- \* Mic 1 of VOX feature with priority over other inputs except tel input, vox level is provided
- \* 1 Aux input, tel input and music on hold for telephone paging system
- \* Built-in chime and chime activation button on front panel
- \* SD card slot to read MP3 files
- \* Pre out and amp input for other signal processing equipments like mixer and EQ
- \* Mic1-2, aux and master volume control, bass and treble tone control
- \* Play modes, play/pause, stop/return, previous, next functional buttons for MP3 player
- \* Power indicator and output level meter, SD card error and play indicators
- \* Current limiter, overload, short-circuit and thermal protection

## Specifications


|                         |   |
|-------------------------|---|
| Model                   | T-60MP  |
| Rated Power Output      | 60W   |
| Speaker Outputs         | 70V, 100V & 4~16Ω                                   |
| Frequency Response      | 50Hz~15KHz(± 2dB)                                   |
| MIC 1 and MIC 2         | ± 2mV/10KΩ , balanced<br>± 2mV/600Ω , XLR connector |
| AUX Input               | 350mV/10KΩ  |
| Telephone Input         | 1V/10KΩ   |
| Amp Input               | 0.775V/600Ω   |
| Line Input/Impedance    | 1V/600Ω   |
| Music on hold/Impedance | 0.775V/600Ω   |
| MP3                     |   |
| Frequency Response      | 20Hz~20KHz(+1/-3dB)                                 |
| THD                     | <0.5%   |
| Power Supply            | ~110V/60Hz or ~230V/50Hz                            |
| Power Consumption       | 100W  |
| Dimensions              | 484×300×88mm  |
| Net Weight              | 9.1Kg   |

## Optional

\* Panel with/without handhold

\* Faults monitoring module, it can output short circuit signal to achieve main/spare amplifier switch.

Rear Panel

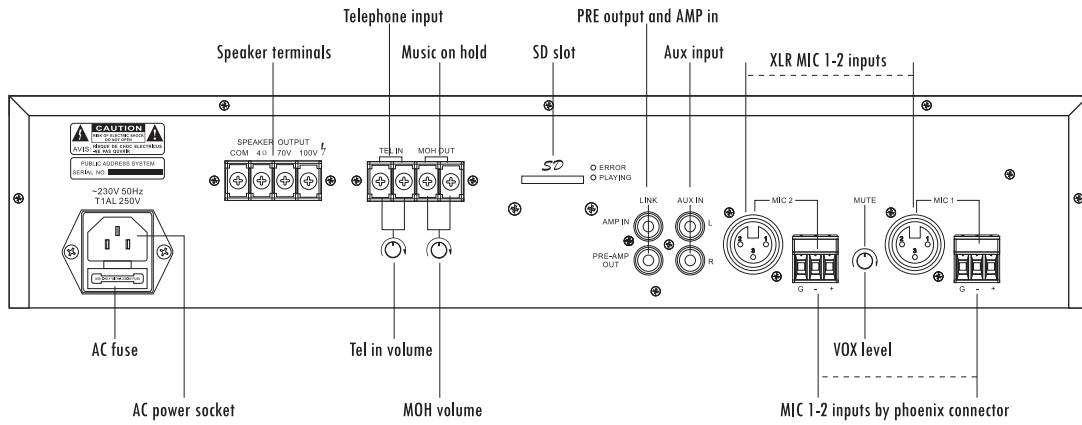

Connections

