



## Descriptions

The mixer amplifier with CD player is 120W. Its design is suitable for both tabletop and rack mount.

The one mic inputs by XLR type, phantom power and gain control for mic 1 is provided. One 3.5mm earphone aux input and one dual RCA aux input (with volume control on rear panel) are provided for extra audio sources inputs. One line output could feed signal to an extra power amplifier.

These 100V, 70V and low impedance 4-16ohm speaker terminals are flexible for user during installation. The 100V technique reduces line losses on longer distances and allows easy parallel connection of multiple loudspeakers.

It is typically used in villas, shops, supermarkets, restaurants, bars, theme parks, schools, canteens, garages and other places where BGM creates the right atmosphere, as well as clear voice announcement is needed.

## Features

- \* Amplifier built-in CD player
- \* Tabletop and rack mount design
- \* Rated power output from 120W
- \* 100V, 70V and low impedance 4-16ohm speaker outputs
- \* 1 mic inputs by XLR type with phantom power and gain control
- \* Mic 1 of VOX feature with priority over other inputs
- \* One 3.5mm earphone aux input suitable for laptop or Iphone
- \* One dual RCA aux input on rear panel with volume control is provided
- \* Line output for an extra power amplifier
- \* CD, aux1-2, mic volume control and bass/treble tone control
- \* 5 functional buttons on front panel
- \* Power and protection indicator and output level meter
- \* Current limiter, overload, short-circuit and thermal protection


## Optional

- \* Panel with/without handhold


## Specifications

|                       |  |
|-----------------------|--|
| Model                 | T-120CD                                    |
| Rated Power Output    | 120W                                       |
| Speaker Outputs       | 70V,100V & 4-16Ω                           |
| Aux Input Sensitivity | 350mV/15KΩ                                 |
| Frequency Response    | 50Hz~15KHz (± 2dB)                         |
| S/N Ratio(AUX)        | Better than 85dB                           |
| T.H.D                 | Less than 0.5% at 1KHz, 1/3 rated power    |
| Controls              | Power switch, bass, treble, volume control |
| Indicators            | Power LED, output level meter, protect     |
| Protection            | Short-circuit, high temperature            |
| Power Supply          | ~110V/60Hz or ~230V/50Hz                   |
| CD PLAYER             |  |
| Frequency Response    | 20Hz-20KHz(+1/-3dB)                        |
| Distortion            | <0.5%                                      |
| S/N                   | >85dB                                      |
| Power Consumption     | 200W                                       |
| Dimension             | 440 x 360 x 88mm                           |
| Weight                | 12.5Kg                                     |

## Front Pane

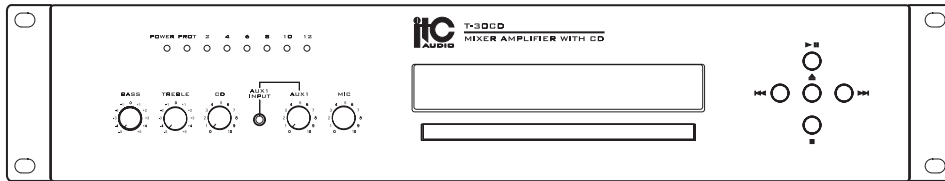

## Rear Panel

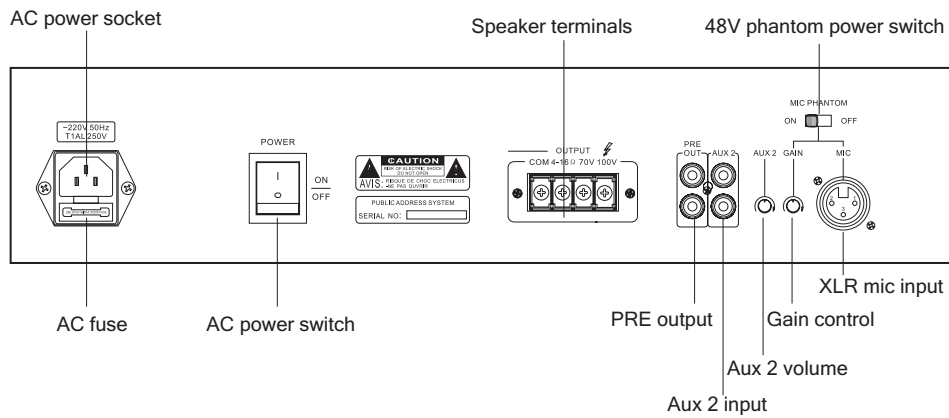

## Connections

