



10W 100V Tel Input

Features

Wall mount or tabletop designs available.

Mic1 input by 1/4" phone jack, Aux1 input by dual RCA, tel input by phoenix connector.

Mic with Vox priority and telephone input with secondary input over all other inputs.

100V and 4-16ohms speaker outputs.


AC 120V or 230V to DC 12V power adapter to supply power. Mic1, Aux1 and tel volume control and bass/treble tone control.

Wall mount bracket available.

Specifications

Model	T-10AP
Rated Power Output	10W
Speaker Outputs	70V, 100V & 4~16Ω
Input Sensitivity & Impedance	MIC: 5mV/600Ω , Unbalanced TRS input TEL: 1000mV/10KΩ , Unbalanced RCA input AUX: 350mV/10KΩ , Unbalanced RCA input
Output Sensitivity & Impedance	LINE OUT: 1000mV/470Ω , Unbalanced RCA output
Tone	Bass: ± 10dB at 100Hz Treble: ± 10dB at 10KHz
Frequency Response	50Hz~16KHz(+1dB, -3dB)
S/N Ratio	MIC: 66dB, AUX: 80dB
THD	Less than 0.5% at 1KHz, 1/3 rated power
Muting Function	MIC 1 overrides other input signals with 30dB attenuation
Crosstalk	≤ 50dB
Phantom Power	+48V
Cooling	Button-up convect and cool
Protection	High temp, overload & short-circuit
Power Supply	~110V/60Hz or ~230V/50Hz or DC 24V
Power Consumption	20W
Weight	1.2Kg
Dimensions	200×150×44mm
Finish	Panel: aluminum plate, black Case: steel plate, black

Rear Panel

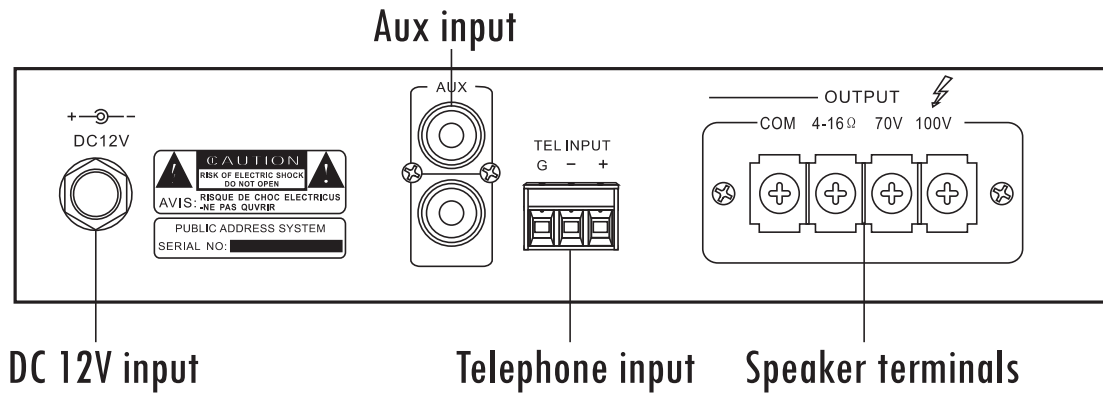

Connections

