



- 5"/6"/8" fireproof version ceiling speaker
- Economy range design for voice evacuation system
- Ceramic connector, thermal use and fire-resistant cable
- 5 power taps at 100V output
- All metal material design with fire dome
- Fast installation by spring clip
- Excellent response for background music and voice message
- EN54-24 certification is under taken

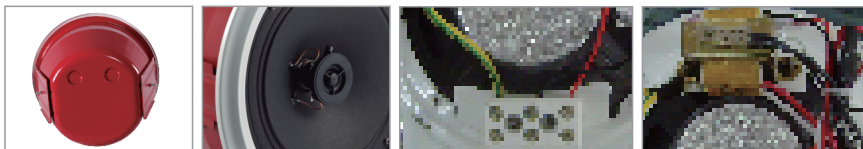

### Specifications

<b>Model</b>	T-585
<b>Power Taps @100V</b>	0.93W, 1.87W, 3.75W, 7.5W, 15W
<b>Power Taps @70V</b>	0.46W, 0.93W, 1.87W, 3.75W, 7.5W
<b>Impedance</b>	Com/670Ω /1.3KΩ /2.6Ω /5.3KΩ /10.7KΩ
<b>SPL(1W/1M)</b>	93dB
<b>Max. SPL (Rated W/1M)</b>	105dB
<b>Frequency Response (-10dB)</b>	80-20KHz
<b>Finish</b>	Baffle: Steel, Red Grille: Steel, White
<b>Speaker Driver</b>	8" x 1 1.5" x 1
<b>Cutout Size</b>	240mm
<b>Dimensions</b>	270 x 130mm
<b>Weight</b>	1.7Kg