



Descriptions

Mic1 input by combined connector of 1/4" phone jack and XLR with phantom power, Mic2-3 by 1/4" phone jack, Aux1 input by dual RCA, tel input by phoenix connector. Line output by dual RCA type. Mic with Vox priority (with Vox level control) and telephone input with secondary input over all other inputs. 100V, 70V and 4-16 ohms speaker output. AC 120V or 230V operation. Mic1-3, Aux1, tel, master volume control and bass/treble tone control. High temp short circuit and over load protection.


Optional

* DC 24V

Specifications

Model	T-120AP
Rated Power Output	120W
Speaker Outputs	70V, 100V & 4~16Ω
Input Sensitivity & Impedance	MIC1, 2, 3: 5mV/600Ω, Unbalanced TRS input MIC1: ±2.5mV/2KΩ TEL: ±175mV/10KΩ AUX: 350mV/10KΩ, Unbalanced RCA input
Output Sensitivity & Impedance	LINE OUT: 1V/470Ω, Unbalanced RCA output
Overload Electromotive Force	MIC 1, 2, 3: >10dB MIC1: >15dB AUX: >15dB, Unbalanced RCA input TEL: >12dB
Tone	Bass: ±10dB, Treble: ±10dB
Frequency Response	50Hz~16KHz (+1dB, -3dB)
S/N Ratio	MIC: 66dB, AUX: 80dB
THD	Less than 0.3% at 1KHz, 1/3 rated power
Muting Function	MIC 1 overrides other input signals with 30dB attenuation
Crosstalk	≤50dB
Phantom Power	+48V
Cooling	Button-up convert automatic cool
Protection	High temp, overload & short-circuit
Power Supply	~110V/60Hz or ~230V/50Hz or DC 24V
Power Consumption	200W
Weight	7.8Kg
Dimensions	484x303x88mm
Finish	Panel: aluminum plate, black Case: steel plate black

Rear Panel T-120AP

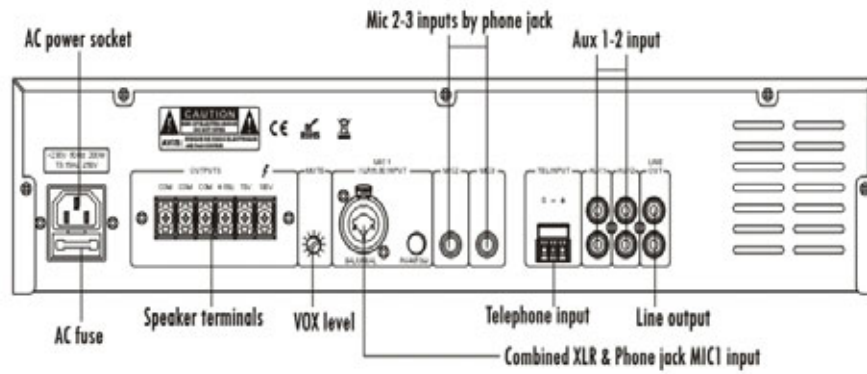

Connections

