

Features

- Built-in 100v/70v transformer
- In-ceiling type loudspeaker
- Ceramic connector, thermal fuse and fire-resistant cable
- 8" speaker unit
- Power taps 0.93w-1.87w-3.75w-7.5w-15w @100V
- Metal grille, metal baffle and fire dome metal back can

Description

The T-585 is a fireproof ceiling speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 8" speaker driver is designed of wide frequency response 130-15kHz, the multiple power taps 0.93W, 1.87W, 3.75W, 7.5W & 15W are helpful for different applications varies from room size and ambient noise surroundings.

The metal grille, metal baffle and fire dome metal back can plus ceramic connector, thermal fuse and fire-resistant cable, all of the above features make it is fireproof. Its spring clamp type makes the easy and secure installation.


This fireproof ceiling speaker is specially designed for fire alarm and voice evacuation system, which is designed and manufactured according to EN54-24 standard. It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.




Specification

Model	T-585
Power Taps @100V	0.93W, 1.87W, 3.75W, 7.5W, 15W
Power Taps @70V	0.46W, 0.93W, 1.87W, 3.75W, 7.5W
Impedance	Com/10.7KΩ/5.3KΩ/2.6Ω/1.3KΩ/670Ω
SPL(1W/1M)	93dB
Max. SPL (Rated W/1M)	105dB
Frequency Response (-10dB)	80-20KHz
Finish	Baffle: Steel, Red Grille: Steel, White
Speaker Driver	8" x 1 1.5" x 1
Cutout Size	240mm
Dimensions	270 x 130mm
Weight	1.7Kg

Appearance:

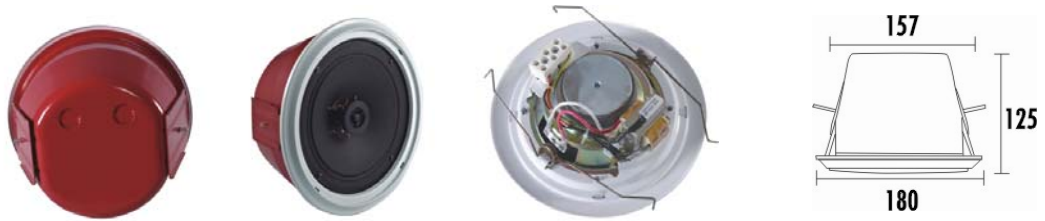

Direction Diagram:

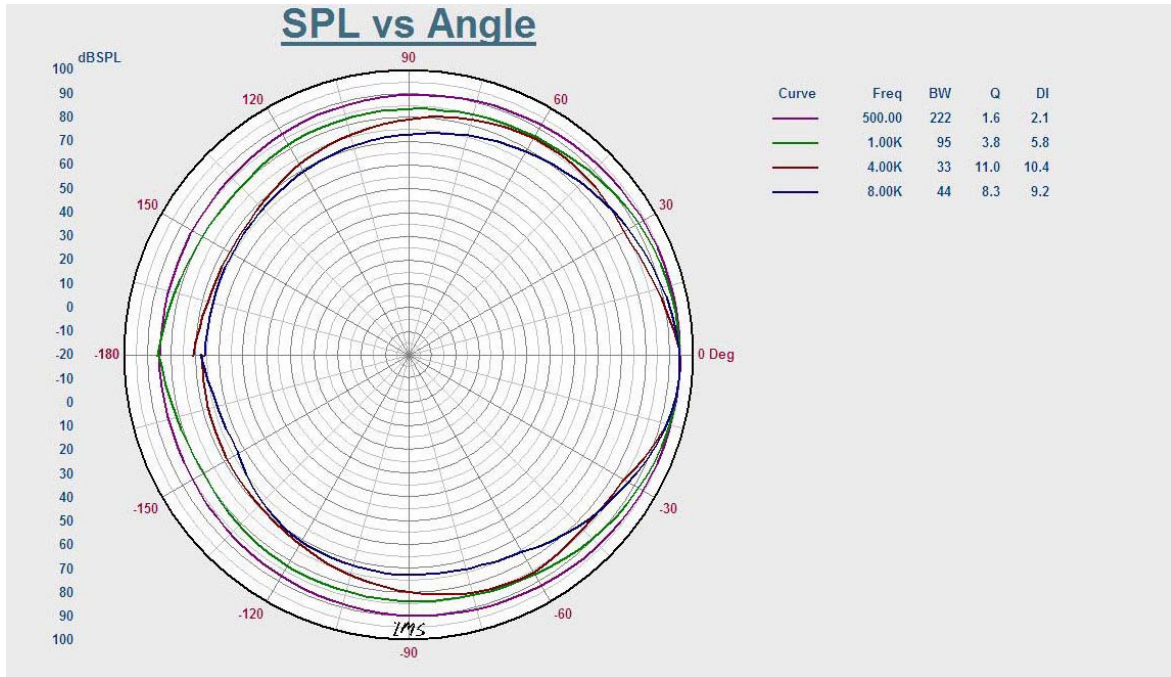

Frequency Response:

