



Features

- * Background music + 16 zone paging + voice message alarm
- * Built-in 8 inputs 16 outputs audio matrix
- * Built-in weekly scheduled timer
- * Built-in 16 zone speaker selector for remote paging console
- * Built-in 6 channel power sequencer
- * Built-in MP3 player of 2GB memory card through SD card slot
- * Built-in monitor
- * With telephone paging, fire alarm and remote paging console interface
- * With regular program and spare program
- * With Mic emergency announcement and CD/MP3 manual priority broadcast With memory function after power off
- * Each day program operation up to 200 steps

Matrix Background Music System

- * 4 extra program sources plus built-in MP3 matrix distributed into 16 zones 8 inputs and 16 outputs
- * Manual CD/MP3 priority broadcast at particular circumstance
- * The music will not be interrupted when paging console is make zone paging CD AM/FM tuner, MP3 player as program audio sources
- * Playing modes: random, single circle, repeat and all circle
- * Music system will be monitored by operator in control room

Remote Zone Paging System

- * T-6600 built-in 16 zone speaker selector
- * With T-218 to achieve individual, group, each ten, all zone paging
- * T-218 paging with priority over music except EMC (fire alarm input) and Mic 1 (T-6600 front panel)
- * T-218 remote paging distance within 1 kms through Cat 5 cable and RJ45 communication port
- * T-6600 can work with several T-218 at the same time
- * There is no interference other zones music when zone paging is made Manual zone select paging system on T-6600 front panel

Voice Message Alarm System

- * Work with T-6203 to achieve all zone voice alarm system
- * Fire alarm system with priority except Mic 1
- * Work with T-6223(A) to achieve all zone, group zone, neighboring zone multi voice alarm system


Expansion Functions

- * Each zone power output no limit even higher than 5000W
- * Telephone paging interface, extra power sequencer, extra monitor panel could be added

Specifications

Model	T-6600
Input	8 channels, AUDIO IN: 10K ohms, 0.775V unbalanced, MIC: 600 Ω , 10mV unbalanced
Output	16 channels, 1K Ω , 0~1.5V unbalanced
Frequency Response	30Hz~18KHz
THD	Less than 0.1%
Communication Port	4800bps, RJ45 connector, RS422/RS485 protocol
MP3 Frequency Response	20Hz~20KHz/ 1dB
MP3 S/N Ratio	95dB
MP3 Storage	External Compact Flash Card; File Format: FAT12, FAT16, FAT32
Monitor	Built-in loudspeaker, 0.5W
Cycle Time	24 hrs
Alarm Signal	Input: 0V(Short Circuit) Industrial Standard; Output: 0V(Short Circuit) Industrial Standard
Timer Power Output	6 Channels, 110~120VAC or 230~240VAC 50/60Hz; Total Capacity: 5KW; Max Per Socket: 1KW
Controls	Power switch, 8 AUDIO IN, MIC and MONITOR volume controls Program edit, 16 AUDIO channels, MONITOR, CD, MP3, NORMAL, and 3 SWIFT pushbuttons
Indicators	Power LED, LCD display, channel status and operational status LEDs
Power Supply	~110V/60Hz or ~230V/50Hz
Power Consumption	30W
Weight	7.5Kg
Dimensions (WxDxH)	484x304x132mm
Finish	Panel: aluminum plate, Case: steel plate

Rear Panel T-6600

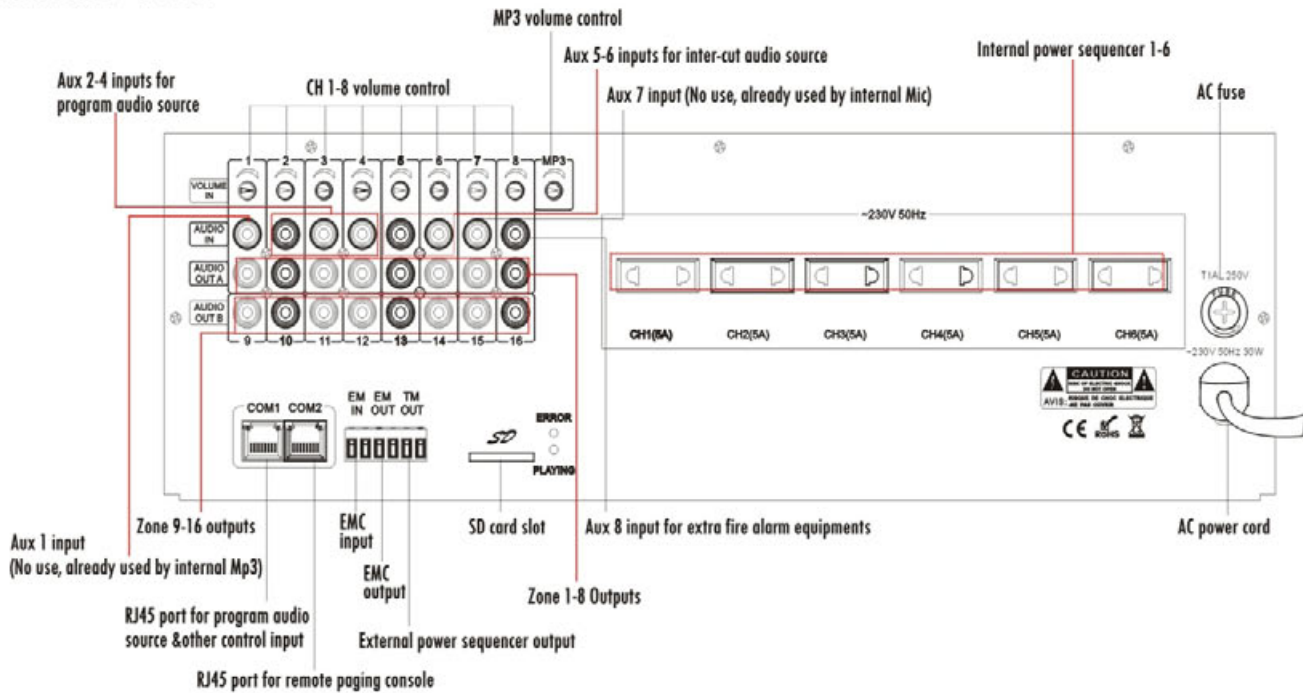

Connections

