

Features

- Built-in 100v/70v transformer
- In-ceiling type loudspeaker
- 6"+1.5" coaxial speaker unit
- Power taps 3.8W, 7.5W, 15W & 30W @100V plus 8ohm
- With metal back can
- Metal grille and back can & ABS baffle
- Paint in RAL9016 white

Description

The T-206CW is a ceiling speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 6"+1.5" coaxial speaker driver is designed of wide frequency response 100-20kHz, the multiple power taps 3.8W, 7.5W, 15W & 30W plus 8ohm version are helpful for different applications varies from room size and ambient noise surroundings. The metal grille, metal back can and ABS baffle are painted in attractive RAL9016 white color. Its flush mount type makes the easy and secure installation.





It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.



Specification

Model	T-206CW
Power Taps @100V	3.8W, 7.5W, 15W, 30W
Power Taps @70V	1.9W, 3.8W, 7.5W, 15W, 30W
Transformer Impedance	2.6KΩ/ 1.3KΩ/670Ω/330/165Ω
Input	70V/100V/8Ω
SPL(1W/1M)	89dB ±3dB
Max. SPL (Rated W/1M)	104dB
Frequency Response (-10dB)	100-20KHz
Finish	Baffle: ABS, White Cover,Grille: Steel, White
Speaker Driver	6" ×1 1.5" ×1
Cutout Size	208mm
Dimensions	233×165mm
Weight	1.6Kg
Mounting	Flush-mount dog ears

Appearance:

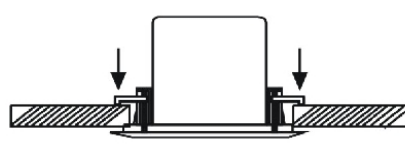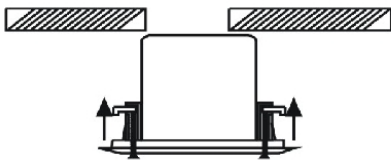

Frequency Response

